

Saturn LED **Premium** Products
2019

THE TITAN RANGE





THE TITAN RANGE

Saturn LED
Premium Products
2019



Saturn Lighting would like to introduce you to our Titan Range of premium LED lighting. We were established in 1995 and are still a privately owned company, operating from Bolton, Greater Manchester.

Saturn lighting offers a comprehensive range of products under the "Preslite" and "Prestronic" trade names. Saturn Lighting can now offer a range of highly efficient LED luminaires incorporating high quality branded components from the likes of Philips Lighting, Helvar, Tridonic and ELT.

Saturn also offers a LED emergency conversion service as well as bespoke conversions to high efficiency LED light sources in existing fittings.



AREA LIGHTING



Serving the commercial
lighting industry since 1993

Model: AL35EQ

LED Pro 405mm

Optics:


IES Types I, II, III, V

System Wattage
187w (174w)
Lumens
16,000 - 17,500

System Wattage
286w (262w)
Lumens
26,500 - 31,000

IP66 - Replaces
up to 400W MH.

IP66 - Replaces
up to 1000W MH.

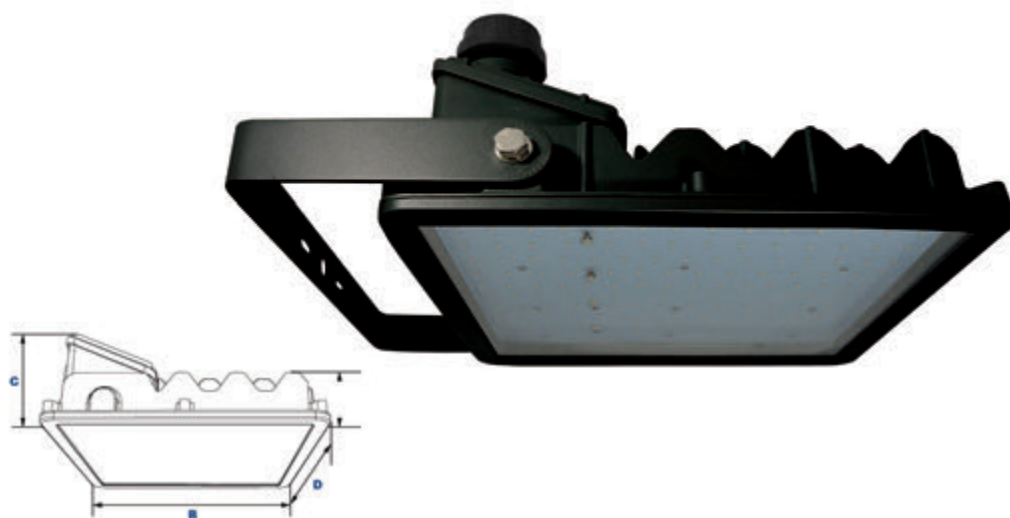

Model: AD25EQ

Bergamo LED Pro

Optics:

IES Types III & V




System Wattage
61w (56w)
Lumens
Up to 7,200

System Wattage
121w (112w)
Lumens
Up to 14,500

IP66 - Replaces
up to 250W MH.

IP66 - Replaces
up to 400W MH.

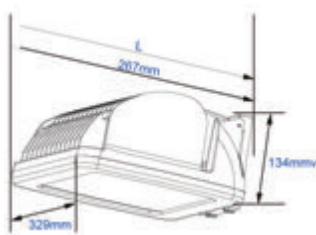

Model: KH15EQ

Aston LED Pro

Mini Eagle

Optics:

IES Types III & V




System Wattage
24w (22w)
Lumens
2,560 - 2,880

System Wattage
43w (37w)
Lumens
3,630 - 4,900

IP66 - Replaces
up to 70W MH.

IP66 - Replaces
up to 175W MH.

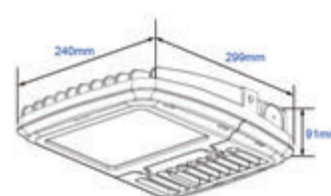

Model: KH25EQ

Aston LED Pro

Mini Eagle

Optics:

IES Types I, II, III, V




System Wattage
87w (81w)
Lumens
9,700-10,600

System Wattage
120w (112w)
Lumens
14,000-15,500

IP66 - Replaces
up to 250W MH.

IP66 - Replaces
up to 400W MH.

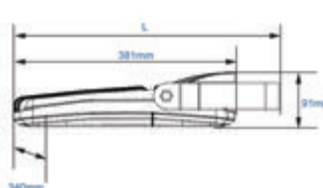

Model: KH45EQ

Aston LED

Pro Eagle

Optics:

IES Types I, II, III, V




System Wattage
177w (167w)
Lumens
20,000 - 22,500

System Wattage
281w (256w)
Lumens
28,000 - 33,500

IP66 - Replaces
up to 400W MH.

IP66 - Replaces
up to 1000W MH.

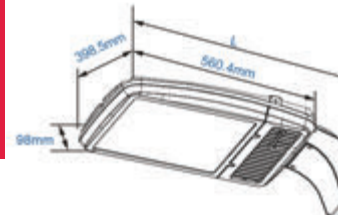

AREA LIGHTING



Serving the commercial
lighting industry since 1993



Model: ST30EQ

Aston LED Pro

Optics:
IES Types III & V



System Wattage
180w
Lumens
21,000 - 21,500

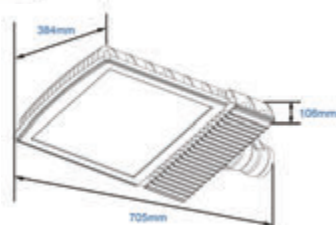

IP66 - Replaces up to 400W MH.



Model: ST35EQ

Aston LED Pro

Optics:
IES Types III & V



System Wattage
301w
Lumens
28,500 - 35,500

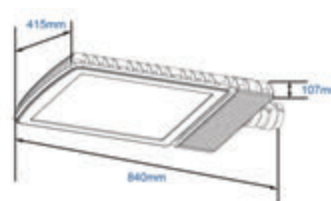

IP66 - Replaces up to 1000W MH.



Model: PF70EQ

Capri Small

Optics:
IES Type V



System Wattage
93w
Lumens
7,300

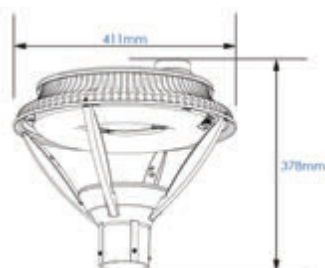

IP66 - Replaces up to 250W MH.


Model: PF71EQ

Capri Small

Optics:
IES Type V



System Wattage
93w
Lumens
5,900



IP66 - Replaces up to 250W MH.



Model: PF80EQ

Capri Area

Optics:
IES Type V



System Wattage
186w
Lumens
17,500

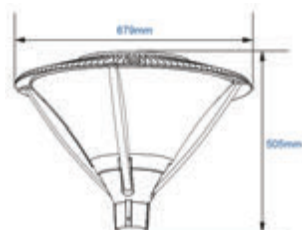

IP66 - Replaces up to 400W MH.


Model: PF81EQ

Capri Area

Optics:
IES Type V



System Wattage
186w
Lumens
15,000



IP66 - Replaces up to 400W MH.

BOLLARDS



Serving the commercial lighting industry since 1993

Model: B1EC3

Round LED Bollard

Optics:
IES Type V

System Wattage
20w
Lumens
2,290



IP66 - Replaces up to 70W MH.




Model: B2EC3

Square LED Bollard

Optics:
IES Type V



System Wattage
20w
Lumens
2,410



IP66 - Replaces up to 70W MH.




Model: BORLEQSS

LED Pro Domus

Optics:
IES Type V



System Wattage
17w
Lumens
1,510



IP55 - Replaces up to 70W MH.




Model: BORLEQ

LED Pro Domus

Optics:
IES Type V



System Wattage
17w
Lumens
1,510



IP55 - Replaces up to 70W MH.



Model: BOFRLEQ

LED Pro Flat

Optics:
IES Type V



System Wattage
17w
Lumens
1,520



IP55 - Replaces up to 70W MH.



BOLLARDS




Serving the commercial lighting industry since 1993


Model: BOSFRLEQ

LED Pro Square

Optics:
IES Type V

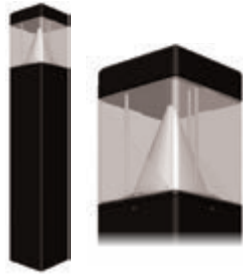

System Wattage
17w
Lumens
1,520



IP55 - Replaces up to 70W MH.




Round Model: B3EQ
Square Model: B4EQ

Capri Round & Square


Optics:
IES Type V



System Wattage
20w
Lumens
1,540 - 1,620



IP66 - Replaces up to 70W MH.

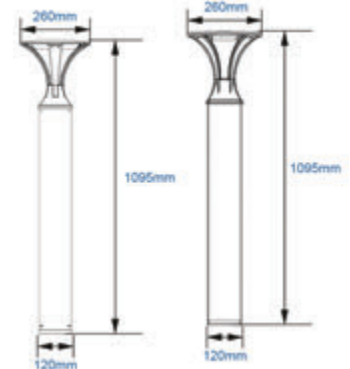

HIGH BAY LIGHTING

Model: HB44EQ

Aston 406mm

Available Lens:
Tempered Clear Flat Glass Lens
Tempered Clear Flat Prismatic Glass Lens
Acrylic Conical Lens
Polycarbonate Drop Lens



Highbay
System Wattage
179w
Lumens
16,000 - 20,000

Aisle Lighter
System Wattage
179w
Lumens
16,000 - 19,000



IP54 - Replaces up to 400W MH.

Model: HB45EQ


Aston 558mm

Available Lens:
Tempered Clear Flat Glass Lens
Tempered Clear Flat Prismatic Glass Lens
Acrylic Conical Lens
Polycarbonate Drop Lens



Highbay
System Wattage
291w
Lumens
23,000 - 32,500

Aisle Lighter
System Wattage
291w
Lumens
Up to 31,500

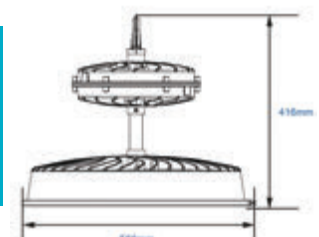

IP54 - Replaces up to 1000W MH.

FLOOD LIGHTING



Serving the commercial lighting industry since 1993

Model: AD25EQ

Bergamo LED Pro

Beam Angles:


120°Hx110°V

System Wattage
61w (56w)
Lumens
Up to 7,200

System Wattage
121w (112w)
Lumens
Up to 14,500

IP66 - Replaces
up to 250W MH.

IP66 - Replaces
up to 400W MH.

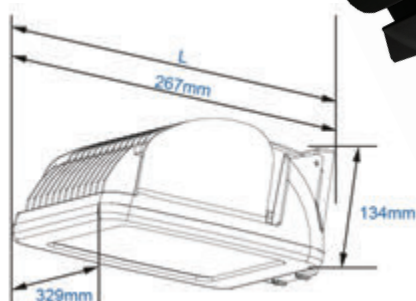

Model: KH15EQ



Aston LED Pro

Mini Eagle

Beam Angles:

110°Hx80°V, 110°Hx110°V

Beam Angles:


110°Hx110°V

System Wattage
24w (22w)
Lumens
2,570 - 2,860

System Wattage
43w (37w)
Lumens
4,500 - 4,800

IP66 - Replaces
up to 70W MH.

IP66 - Replaces
up to 175W MH.

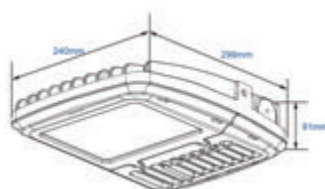

Model: KH25EQ



Aston LED Pro

Mini Eagle

Beam Angles:

130°Hx70°V, 140°Hx60°V,

110°Hx110°V

Beam Angles:

120°Hx70°V, 120°Hx70°V,


110°Hx110°V

System Wattage
87w (81w)
Lumens
9,500 - 10,600

System Wattage
120w (112w)
Lumens
14,000 - 15,500

IP66 - Replaces
up to 250W MH.

IP66 - Replaces
up to 400W MH.

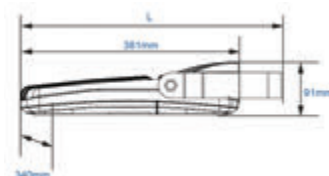

Model: KH45EQ



Aston LED Pro

Mini Eagle

Beam Angles:

130°Hx70°V, 120°Hx70°V,

120°Hx110°V

Beam Angles:

130°Hx70°V,


110°Hx60°V, 110°Hx110°V

System Wattage
177w (167w)
Lumens
20,000 - 22,000

System Wattage
281w (256w)
Lumens
27,500 - 33,500

IP66 - Replaces
up to 400W MH.

IP66 - Replaces
up to 1000W MH.

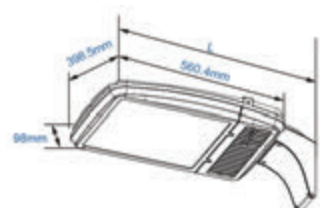

Model: AL35EQ



LED Pro 405mm

Beam Angles:

110°Hx70°V, 110°Hx110°V

Beam Angles:

150°Hx100°V, 140°Hx140°V,


110°Hx110°V

System Wattage
187w (174w)
Lumens
16,000 - 17,500

System Wattage
286w (262w)
Lumens
26,500 - 30,500

IP66 - Replaces
up to 400W MH.

IP66 - Replaces
up to 1000W MH.

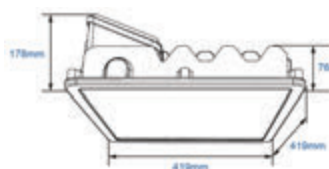

FLOOD LIGHTING



Serving the commercial lighting industry since 1993


Model: TV2EC3



Small Traverse LED Flood
Beam Angles:
110°Hx95°V
Beam Angles:
100°Hx90°V

System Wattage
21w (20w)
Lumens
2,310

System Wattage
43w (40w)
Lumens
4,100

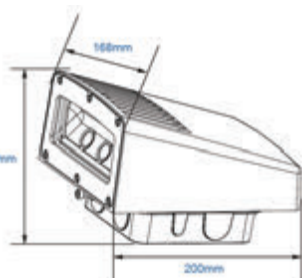

IP65 - Replaces up to 70W MH.

IP65 - Replaces up to 175W MH.


Model: TV3EC3



Large Traverse LED Flood
Beam Angles:
105°Hx90°V
Beam Angles:
100°Hx80°V

System Wattage
57w (60w)
Lumens
6,600

System Wattage
80w (80w)
Lumens
8,300

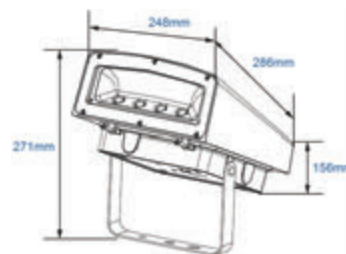

IP65- Replaces up to 250W MH.


IP65- Replaces up to 400W MH.

Model: FB1EC3



Turbine C³ LED Bullet
Beam Angles:
80°Hx80°V,
95°Hx95°V

System Wattage
20w
Lumens
2,330-2,380




IP65 - Replaces up to 100W MH.

Model: FL20EL




Small LED Flood
Beam Angles:
115°Hx100°V

System Wattage
21w
Lumens
2,330



IP65 - Replaces up to 70W MH.

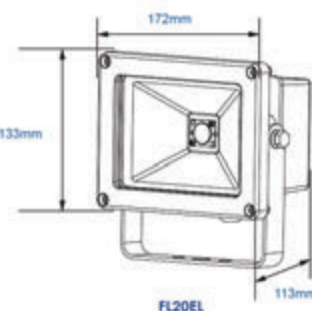

IF IT'S LIGHTING WE DO IT

Can't find what you are looking for, call our advisors and they can help, we have 1000's of products in our range, they can advise best suitability for your next project.

tel: 01204 575100



CAR PARK & CANOPY LIGHTING




Serving the commercial
lighting industry since 1993


Model: VN30EQ

LED Pro Medium Vandal

Optics:
IES Type V

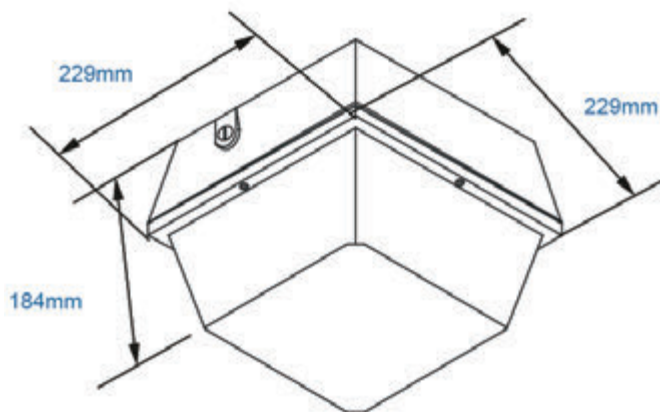

System Wattage
28w
Lumens
3,350



IP55 - Replaces up to 100W MH.



THE TITAN RANGE

Engineered with
careful consideration
for the best possible
performance

www.saturnlighting.co.uk

LINEAR LED




Serving the commercial
lighting industry since 1993

Model: LV1AOE, LV1AHE, LV1AVE

309mm LED Pro

System Wattage
26w or 41w
Lumens
2,300-4,800

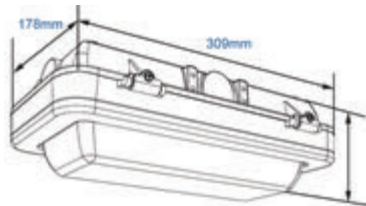


IP66

Model: LV2AOE

614mm LED Pro



System Wattage
58w or 77w
Lumens
5,700- 8,100

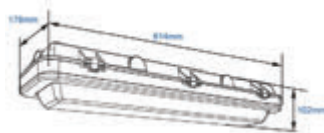

IP66

Model: LV4AOE

1247mm LED Pro



System Wattage
126w or 152w
Lumens
13,500-16,000





IP66

Model: LVNE4

1268mm Narrow Linear LED Non-Corrosive



System Wattage
21w
Lumens
1,990

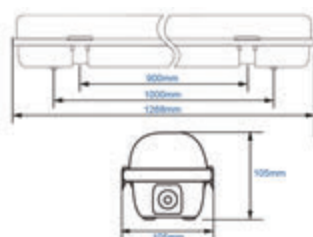



Model: LVE5

1568mm Linear LED Non-Corrosive

Empty housing
also available.
Order model# LVE5AG



System Wattage
70w
Lumens
6,900

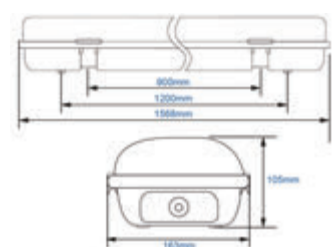

WALL MOUNT



Serving the commercial lighting industry since 1993

Model: WPR25EQ

Round LED Pro

Optics:
IES Type V

System Wattage
20w

Open Face Frame
Lumens 2,330
Grid Face Frame
Lumens 1,980
Half Cutoff Frame
Lumens 1,940

IP65



Model: WPS25EQ

Square LED Pro


Optics:
IES Type V



System Wattage
20w

Open Face Frame
Lumens 2,270
Grid Face Frame
Lumens 1,930
Half Cutoff Frame
Lumens 2,080

IP65

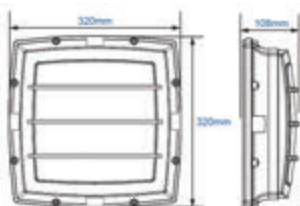

Model: WCTRDEC3




System Wattage
40w
Lumens
3,390-4,500

IP65



Up/Down LED Wall Cylinder

Optics:
Wide, Medium,
& Narrow

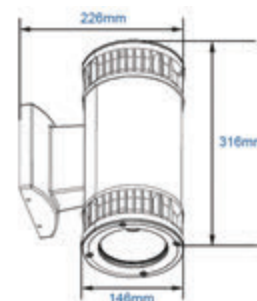

Model: WCTRSEC3


Up or Down LED Wall Cylinder

Optics:
Wide, Medium,
& Narrow



System Wattage
20w
Lumens
2,310-2,320

IP65

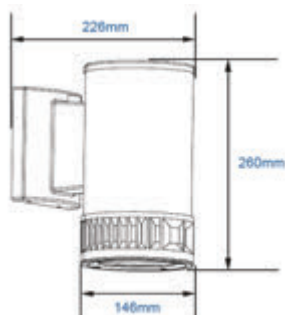

Model: KH15EQ




System Wattage
24w (22w)
Lumens
2,560 - 2,880

IP66

System Wattage
43w (37w)
Lumens
3,630 - 4,900

IP66

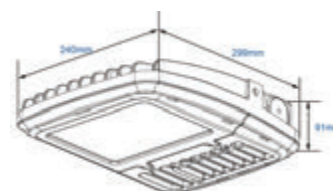

Aston LED Pro Mini Eagle

Optics:
IES Types III & V

WALL MOUNT



Serving the commercial lighting industry since 1993

Model: KH25EQ


Aston LED Pro Mini Eagle

Optics:
IES Types I, II, III, V



System Wattage
87w (81w)
Lumens
9,700 - 10,600

System Wattage
120w (112w)
Lumens
14,000 - 15,500

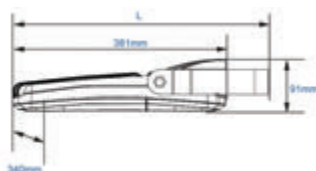

IP66 - Replaces
up to 250W MH.

IP66 - Replaces
up to 400W MH.

Model: AD25EQ


Bergamo LED Pro

Optics:
IES Types III & V



System Wattage
61w (56w)
Lumens
Up to 7,200

System Wattage
121w (112w)
Lumens
Up to 14,500

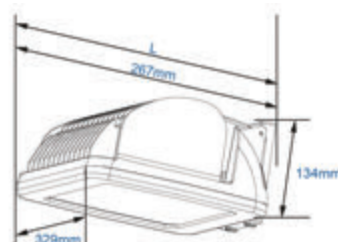

IP66 - Replaces
up to 250W MH.

IP66 - Replaces
up to 400W MH.

Model: TV2EC3


Small Voyager

Optics:
IES Types II & III



System Wattage
20w (20w)
Lumens
2,310

System Wattage
40w (40w)
Lumens
4,100

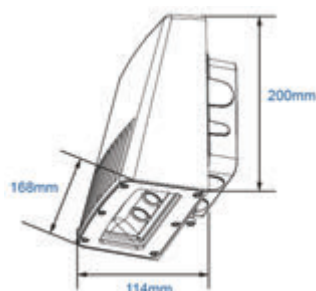

IP65 - Replaces
up to 70W MH.

IP65 - Replaces
up to 175W MH.

Model: TV3EC3


Large Voyager

Optics:
IES Type III



System Wattage
60w (60w)
Lumens
6,600

System Wattage
80w (80w)
Lumens
8,300

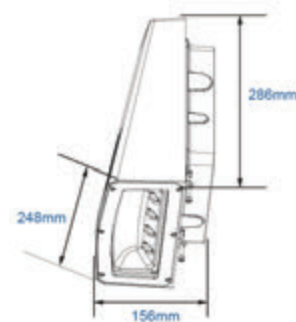

IP65 - Replaces
up to 250W MH.

IP65 - Replaces
up to 400W MH.


Round Model: WBB3EQ
Square Model: WBB4EQ

Capri Round & Square

Optics:
IES Type V



System Wattage
20w
Lumens
1,540 - 1,620



IP66



Model: WP8EQ

LED Pro

Optics:
IES Type IV



System Wattage
10w
Lumens
780
Photocell
Included

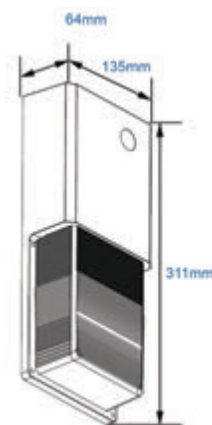

IP55 - Replaces up to 70W MH.

WALL MOUNT



Serving the commercial lighting industry since 1993

Model: WP9EQ



LED Pro
Optics:
IES Type IV

System Wattage
9w
Lumens
680 •
Photocell
Included





IP55 - Replaces up to 70W MH.

Model: WP12EQ



LED Pro Small
Optics:
IES Type IV

System Wattage
28w
Lumens
2,980

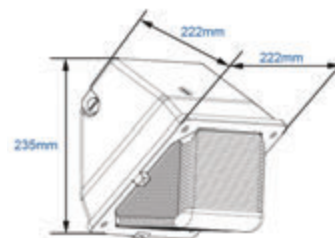

IP55 - Replaces up to 100W MH.

Model: WPB40EQ



LED Pro Varo
Optics:
IES Type IV

System Wattage
37w
Lumens
3,120




IP55 - Replaces up to 175W MH.

Model: WPA25EQ



LED Pro Large Civic
Optics:
IES Type IV

System Wattage
69w
Lumens
5,000





IP55 - Replaces up to 250W MH.

Model: WP35EQ



LED Pro Buckaneer Wall
Optics:
IES Type V

System Wattage
52w
Lumens
5,000

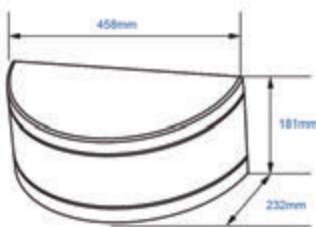

IP55 - Replaces up to 250W MH.

Can't find
what you are
looking for?



Call our advisors and they can help, we have 1000's of products in our range, they can advise best suitability for your next project.

tel: 01204 575100

Model: SP53EC3




LED Pro Sportslighter

584w
320w

60,000 Lumen
30,000 Lumen

Engineered with careful
consideration for the
best possible performance

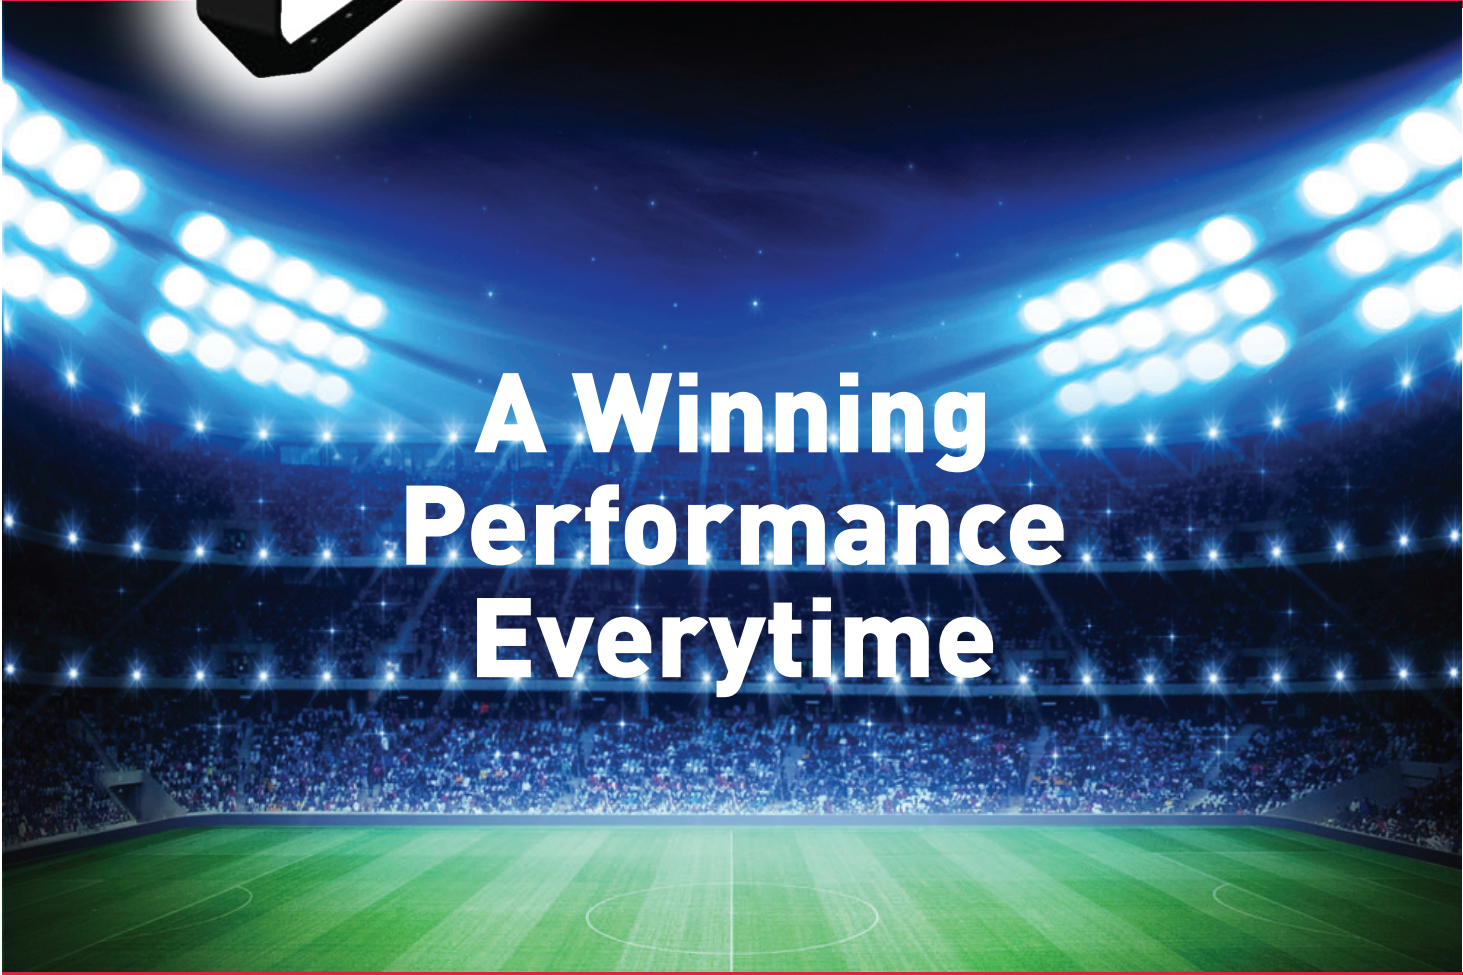

**A Winning
Performance
Everytime**

www.saturnlighting.co.uk

WALL MOUNT



Serving the commercial lighting industry since 1993

Model: WPC36EQ

LED Pro Sirius

Optics:
IES Type V



System Wattage
52w
Lumens
5,400



IP55


Model: WPDLED

Scene Outdoor

Optics:
IES Type I



System Wattage
14w
Lumens
1,200

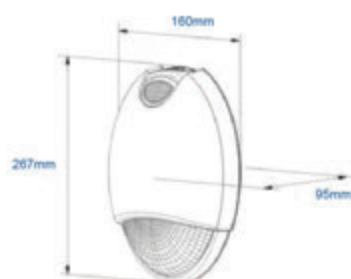

IP65

Model: WPDLEDEM


Scene Outdoor

Optics:
IES Type I

3 HOUR BATTERY INCLUDED



System Wattage
14w
Lumens
1,200

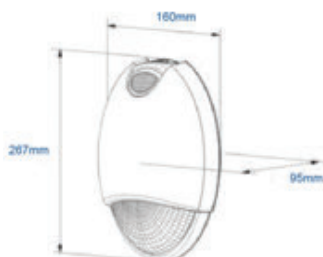

IP65

Model: WPR30E



Orion Small

Optics:
IES Type IV

Empty housing also available,
Order model# WPR30E



System Wattage
20w
Lumens
1,870

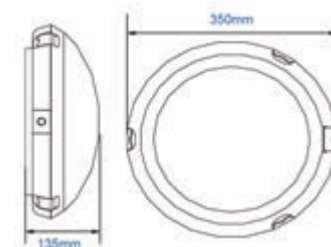

IP65

Model: WPR32E



Orion Large

Optics:
IES Type IV

Empty housing also available,
Order model# WPR32E



System Wattage
30w
Lumens
2,640

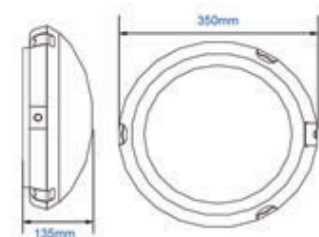


IP65

Model: WPR20HCB

Trent



Die cast aluminium half-cutoff front frame fits Penhale Quantock's Lune fixture. Installs over the existing polycarbonate diffuser. Available in black powdercoat finish. Shown installed.

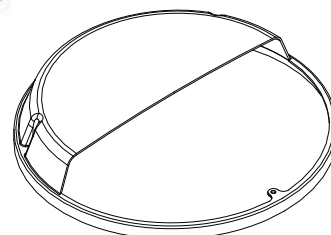

PRODUCTS COMING SOON



Serving the commercial
lighting industry since 1993



Model: PFS80EQ

Capri Square

Optics:
IES Type V



System Wattage
186w
Lumens
19,000



IP66


Model: AS30EQ

Atrium

Optics:
IES Type I



System Wattage
93w
Lumens
(Single): 7,900



IP66



Model: KH55EQ

Eagle Lightning

Optics:
IES Types I, II, III,
IV & V



System Wattage
557w
Lumens
52,000-61,500

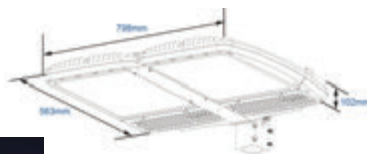

IP66



Model: SP53EC3

Sportslighter

Optics:
NEMA 2X2, 3X3,
4X4, & 5X5



System Wattage
584w
Lumens
60,000

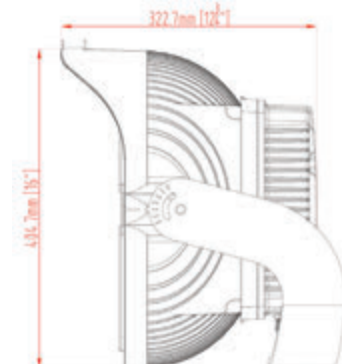



IP66

Model: CP30EQ

Capri Small



System Wattage
93w
Lumens
7,900

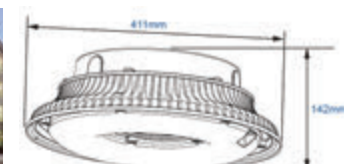


IP66

Model: CP32EQ

Capri



System Wattage
186w
Lumens
Up to 17,500



IP66

PRODUCTS COMING SOON



Serving the commercial
lighting industry since 1993



Model: CP38EQ

Capri Square

Optics:
IES Type V



System Wattage
186w
Lumens
19,000




IP66

Model: HBLEC3

Linear C3 Highbay



System Wattage
120w to 340w
Lumens
Up to 31,200





IP66 Emergency Modules Available.

Model: HB30EC3

Low Profile Highbay



System Wattage
123w to 198w
Lumens
Up to 25,500

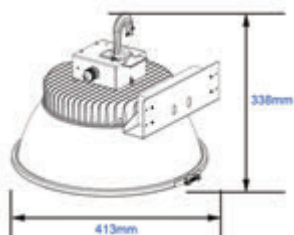



IP54

Model: VN55EQ

LED Pro Canopy



System Wattage
56w
Lumens
5,600

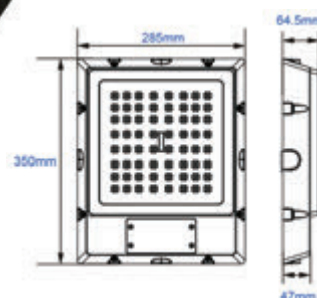


IP65 (Optional Microwave Sensor)

Model: AG24EQ

Guard



System Wattage
55w
Lumens
7,000




IP66

Model: FB2EC3

Small Spitfire



System Wattage
9w
Lumens
700



IP65

PRODUCTS COMING SOON



Serving the commercial
lighting industry since 1993

Model: B5OEQF



**B5 Dark
Sky Bollard**
Optics:
IES Types III & V

System Wattage
16w
Lumens
Up to 4,100




IP66

Model: KH15EQ




**Aston LED Pro
Mini Eagle**
Optics:
IES Types III & V

System Wattage
43-86W
Lumens
Up to 9,800



IP66



Model: B6EQF & B7EQF



**B6/B7 Dark
Sky Round
& Square
Bollard**

System Wattage
22w
Lumens
Up to 2,000




IP66

Model: VB53EQ, VP53EQ, & VW53EQ




LED Sense

System Wattage
27w
Lumens
3,400



IP66

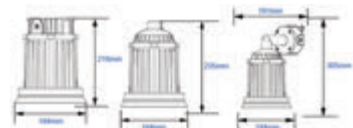

120w COB LED Grow Light
Model: GL33EC3



**914mm COB
LED Grow Light**

Colour Spectrum:
Red - 77.1% / Blue - 22.6% / Green - .3%
Nanometer Ranges:
Red - 600-699 / Blue - 400-499 / Green - 500-599

240w COB LED Grow Light
Model: GL73EC3

System Wattage
120w & 240w




IP66

Model: WPC45EQ



**Power Pack
Wall Mount**

System Wattage
Up to 188w
Lumens
Up to 21,500

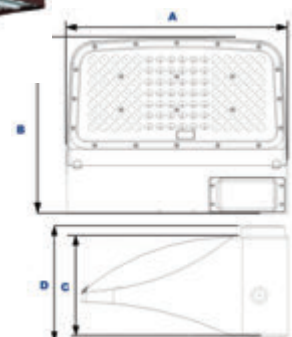

IP66

Saturn Lighting

Stone Hill Road
Express Trading Estate
Farnworth
Bolton
BL4 9TP

Tel | **01204 575100**
Fax | 01204 574100
sales@saturnlighting.co.uk

www.saturnlighting.co.uk

